PowerArc™ Modular 20W Electronic Metal Halide Ballast Module

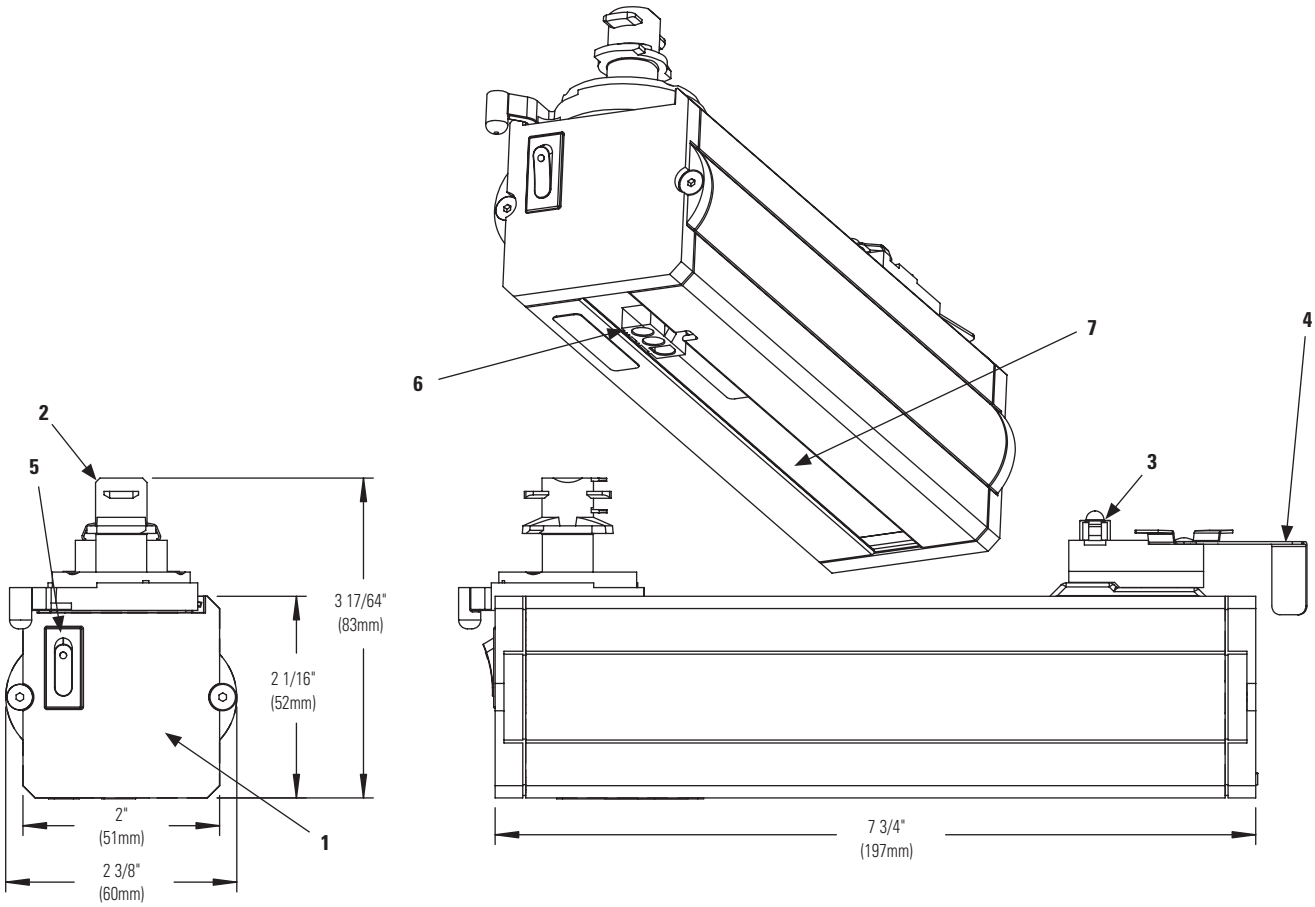

Ordering Information

Catalog No.	Finishes	Track Mountings	Luminaires	Lamp
28B20EWH	Matte White	All ProSpec® Track Systems and Multipoint. DO NOT USE with any other mounting accessories, stem mounted Radius® Track, Lytespan Track Systems, or ATOM®. Can be wall mounted. NO REMOTE MOUNTING.	Use one of: **8314** **83W4**	20W Ceramic Metal Halide
28B20EBK	Matte Black			
28B20EAL	Metallic Aluminum			

Features

1. **Housing:** .10" thick extruded aluminum body with die cast end caps.
2. **Track Attachment Fitting:** Molded polycarbonate; rotates into track.
3. **Ground Clip:** Ensures proper grounding of module.
4. **Safety Locking Lever:** Locks and supports module in track.
5. **On/Off Switch:** Rocker switch to disconnect power to the ballast.
6. **Power Connector:** 5kv rated, insulated. Accepts power connector from fixture.
7. **Integral Track Groove:** To mount PowerArc™ Modular spots and wall wash fixtures.

Electrical

Electronic Ballast

Input Voltage:	120V, 60Hz
Power Factor:	High
Input Power:	24W
Max. Input Current:	0.20A
Total Harmonic Distortion:	<10%
ANSI Code:	M156

Do not use on dimming circuit.

Finish

All painted finishes are baked enamel.

Labels

UL, cUL

Patents

Products shown here are protected by applicable patents and patents pending.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B1108